10GBASE-T SFP+ Copper Transceiver LN-OT-10GT-RJ-4

Description

SFP+-10GBASE-T Copper Small Form Pluggable (SFP) transceivers are based on the SFP Multi Source Agreement (MSA). They are compatible with the 10Gbase-T / 5Gbase-T / 2.5Gbase-T / 1000base-T standards as specified in IEEE Std 802.3. SFP+-10GBASE-T uses the SFP's RX_LOS (must be pulled up on host) pin for link indication. If pull up or open SFP's TX_DISABLE pin, PHY IC be reset.

Features

- Support 10Gbase-T / 5Gbase-T / 2.5Gbase-T / 1000base-T
- Hot-pluggable SFP footprint
- Compact RJ-45 connector assembly
- RoHS compliant and lead-free
- Single +3.3V power supply
- 10 Gigabit Ethernet over Cat 6a cable
- Ambient Operating temperature: 0°C to +65°C

Cable Length

Standard	Standard Cable		Host Port
10Gbase-T	CAT6A	30m	SFI
5Gbase-T/2.5Gbase-t	CAT5E	50m	5GBase-R/2.5GBase-X
1000base-T	1000base-T CAT5E		1000base-FX

SFP to Host Connector Pin Out

Pin	Symbol	Name/Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	1
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	2
4	MOD_DEF (2)	Module Definition 2. Data line for Serial ID.	3
5	MOD_DEF (1)	Module Definition 1. Clock line for Serial ID.	3
6	MOD_DEF (0)	Module Definition 0. Grounded within the module.	3
7	Rate Select	No connection required	
8	LOS	High indicates no linked. low indicates linked.	4
9	VEER	Receiver Ground (Common with Transmitter Ground)	1
10	VEER	Receiver Ground (Common with Transmitter Ground)	1
11	VEER	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VEER	Receiver Ground (Common with Transmitter Ground)	1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	1

Notes:

- 1. Circuit ground is connected to chassis ground
- 2. PHY disabled on $\rm T_{\mbox{DIS}} > 2.0V$ or open, enabled on $\rm T_{\mbox{DIS}} < 0.8V$
- 3. Should be pulled up with 4.7k 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD_DEF (0) pulls line low to indicate module is plugged in.
- 4. LVTTL compatible with a maximum voltage of 2.5V.

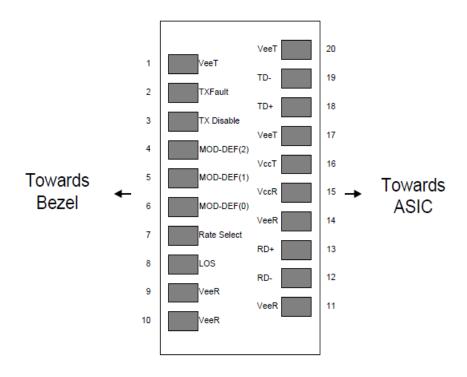


Figure 1. Diagram of host board connector block pin numbers and names

+3.3V Volt Electrical Power Interface

The SFP+-10GBASE-T has an input voltage range of 3.3 V +/- 5%. The 4V maximum voltage is not allowed for continuous operation.

+3.3 Volt Electrical Power Interface										
Parameter	Symbol	Min	Type	Max	unit	Notes/Conditions				
Supply Current	Is		700	900	mA	3.0W max power over full range of voltage and temperature. See caution note below				
Input Voltage	Vcc	3.13	3.3	3.47	V	Referenced to GND				
Maximum Voltage	Vmax			4	V					
Surge Current	Isurge		TBD		mA	Hot plug above steady state current. See caution note below				

Caution: Power consumption and surge current are higher than the specified values in the SFP MSA

Low-Speed Signals

MOD_DEF (1) (SCL) and MOD_DEF (2) (SDA), are open drain CMOS signals (see section VII, "Serial Communication Protocol"). Both MOD_DEF (1) and MOD_DEF (2) must be pulled up to host_Vcc

	Low-Speed Signals, Electronic Characteristics									
Parameter	Symbol	Min	unit	Notes/Conditions						
SFP Output LOW	VOL	0	0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector					
SFP Output HIGH	VOH	host_Vcc -0.5	host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector					
SFP Input LOW	VIL	0	0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector					
SFP Input HIGH	VIH	2	Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector					

High-Speed Electrical Interface

All high-speed signals are AC-coupled internally.

	High-Speed	Electrical In	terface, T	ransmiss	ion Line-SFI		
Parameter	Min	Тур	Max	unit	Not	es/Conditions	
Line Frequency		125		MHz		el encoding, per IEEE 802.3	
Tx Output Impedance Zout,TX		100			Ohm	Differential, for all frequencies between 1MHz and 125MHz	
Rx Input Impedance	Zin,RX		100		Ohm freque		erential, for all encies between Iz and 125MHz
	High-	Speed Elect	rical Inter	face, Hos	t-SFP		
Parameter		Symbol	Min	Тур	Max	unit	Notes/Condition
Single ended data input swing		Vinsing	250		1200	mV	Single ended
Single ended data output swing		Voutsing	350		800	mV	Single ended
Rise/Fall Time		T_r,T_f		175	5	psec	20%-80%
Tx Input Impedance		Zin		50		Ohm	Single ended
Rx Output Impedance		Zout		50		Ohm	Single ended

General Specifications


General											
Parameter	Symbol	Min	Тур	Max	unit	Notes/Conditions					
Data Rate	BR	1		10	Gb/sec	IEEE 802.3 compatible. See Notes 1,2 below					

Notes:

1. Clock tolerance is +/- 50 ppm

Addr	Field Size (Bytes)	Name of Field	нех	Description	
0	1	Identifier	03	SFP	
1	1	Ext. Identifier	04	MOD4	
2	1	Connector	07	LC	
3-10	8	Transceiver	10 00 00 00 00 00 00 00	Transmitter Code	
11	1	Encoding	06	64B66B	
12	1	BR, nominal	67	1000M bps	
13	1	Reserved	00		
14	1	Length (9um)-km	00		
15	1	Length (9um)	00		
16	1	Length (50um)	08		
17	1	Length (62.5um)	02		
18	1	Length (copper)	00		
19	1	Reserved	00		
20-35	16	Vendor name	57 49 4E 54 4F 50 20 20 20 20 20 20 20 20 20 20		
36	1	Reserved	00		
37-39	3	Vendor OUI	00 00 00		
40-55	16	Vendor PN	XX	ASC II	
56-59	4	Vendor rev	31 2E 30 20	V1.0	
60-61	2	Wavelength	03 52	850nm	
62	1	Reserved	00		
63	1	CC BASE	XX	Check sum of byte 0~62	
64-65	2	Options	00 1A	LOS, TX_DISABLE, TX_FAULT	
66	1	BR, max	00		
67	1	BR, min	00		
68-83	16	Vendor SN	00 00 00 00 00 00 00 00 00 00 00 00 00 0	Unspecified	
84-91	8	Vendor date code	XX XX XX 20	Year, Month, Day	
92-94	3	Reserved	00		
95	1	CC_EXT	XX	Check sum of byte 64~94	
96-255	160	Vendor specific			

EEPROM INFORMATION (A2) Optional

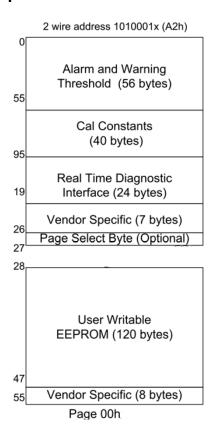

Environmental Specifications

Automatic crossover detection is enabled. External crossover cable is not required


Environmental Specifications									
Parameter Symbol Min Typ Max unit Notes/Conditions									
Operating Temperature	Тор	0		65	°C	Case temperature			
Storage Temperature	Tsto	-40		85	°C	Ambient temperature			

Serial Communication Protocol

All SFPs support the 2-wire serial communication protocol outlined in the SFP MSA. These SFPs use an MCU, can be accessed with address of A0h.

Serial Bus Timing, Requirements										
Parameter	Symbol	Min	Тур	Max	unit	Notes/Conditions				
I ² C Clock Rate		0		200,000	Hz					

Recommended Application Circuit

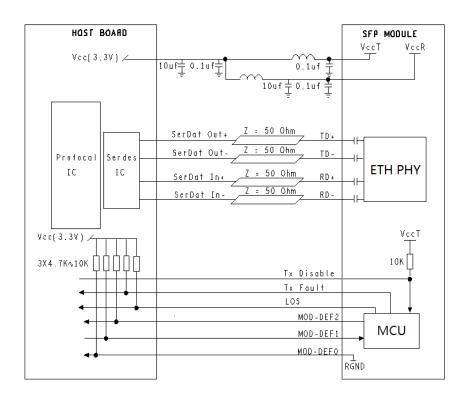

Outline Drawing (mm)

